### DEPARTMENT OF BUILDING SAFETY & **FLOOD PLAIN MANAGEMENT**

**6201 ATLANTIC AVENUE** ROOM 4 823-7987

For Insurance Company Use:

823-7966 FAX

**VENTNOR CITY HALL** 



**VENTNOR CITY, N.J. 08406** 

### Memo of Review For Correctness and Completion

The attached FEMA Elevation Certificate has been reviewed by this office. The items noted below are not correct on the attached form and should read as entered on this page.

**SECTION A - PROPERTY INFORMATION** 

SOKOL 3 ESMERALDA ZHEKU	Policy Number					
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	Company NAIC Number					
City . State ZIP Code						
ventuol 11. 08406						
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)						
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.)  A5. Latitude/Longitude: Lat Long Horizontal Datum:  NAD 1927 NAD 1983						
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance.						
A7. Building Diagram Number 8						
A8. For a building with a crawlspace or enclosure(s):  A9. For a building with an att						
a) Square footage of crawlspace or enclosure(s) 415 sq ft a) Square footage of att						
	od openings in the attached garage					
enclosure(s) within 1.0 foot above adjacent grade c) Total net area of flood openings in A8.b within 1.0 foot above t_2se sq in c) Total net area of floor						
d) Engineered flood openings?						
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATIO						
B1. NFIP Community Name & Community Number  Vanton 345326  B2. County Name Attantic	B3. State  New Tensey					
B4. Map/Panel Number B5. Suffix B6. FIRM Index B7. FIRM Panel B8. Flood	B9. Base Flood Elevation(s) (Zone					
Date Effective/Revised Date Zone(s)	AO, use base flood depth)					
347.07.67.60.61 [2] [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [ [						
345626 0001 B 6-18-1971 9-15-1983 19-8	LO					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.	LO					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.  ☐ FIS Profile						
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.  FIS Profile	be)					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   Community Determined   Other (Describe)						
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.  FIS Profile	be)					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   Community Determined   Other (Describe)	be)					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   Community Determined   Other (Describe)	be)					
310. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   Community Determined   Other (Describe)	be)					
Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   XEIRM   Community Determined   Other (Describe)	be)					
Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.  ☐ FIS Profile ☐ EIRM ☐ Community Determined ☐ Other (Describe) ☐ State of the Eight Describe ☐ State of the Eight Describe ☐ State of the State of State o	be) □ Yes 🔼 No					
Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.    FIS Profile   CAME   Community Determined   Other (Describe)	be) □ Yes					



### **Most Widely Accepted and Trusted**

## **ICC-ES Evaluation Report**

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

**ESR-2074** 

Reissued 02/2019
This report is subject to renewal 02/2021.

DIVISION: 08 00 00-OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

### REPORT HOLDER:

### SMART VENT PRODUCTS, INC.

### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:


MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;

#1540-524; #1540-514

FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence" A Subsidiary of merchance







### ICC-ES Evaluation Report

### ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Cade® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

The ADIBC is based on the 2009 IBC, 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 20 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

### 3.0 DESCRIPTION

### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vartically arranged openings per unit.

### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) apenings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Madel #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

### 3.4 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2inch (51 mm  $\times$  51 mm) squares cut in it. See Figure 4.

### 4.0 DESIGN AND INSTALLATION

### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side, installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness, in order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmarfVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feat (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent<sup>®</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions, in the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC.
430 ANDBRO DRIVE, UNIT 1
PITMAN, NEW JERSEY 08071
(877) 441-8368
www.smartvent.com
info@smartvent.com

TABLE 1-MODEL SIZES

· · · · · · · · · · · · · · · · · · ·	(ACIAL F-)SIOCE		
TO THE REPORT OF THE PARTY OF T	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
MODEL NAME	! <u> </u>	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT®	1540-520		200
SmarfVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	
	1540-524	15 <sup>3</sup> / <sub>4</sub> " × 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door		15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514		200
Wood Wall FloodVENT®	1540-570	14" X B <sup>3</sup> /4"	
AACIC AACIL I INDO ACIL	1540-574	14" X 8 <sup>3</sup> /4"	200
Wood Wall FloodVENT® Overhead Door		16" X 16"	. 400
SmartVENT® Stacker	1540-511		400 -
FloodVent® Stacker	1540-521	16" X 15"	400 -

For Si: 1 inch = 25.4 mm, 1 square foot = m²

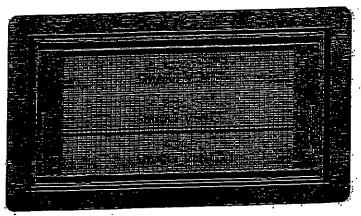


FIGURE 1-SMART VENT: MODEL 1549-510

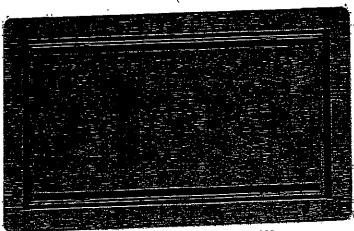


FIGURE 2—SMART VENT MODEL 1540-520

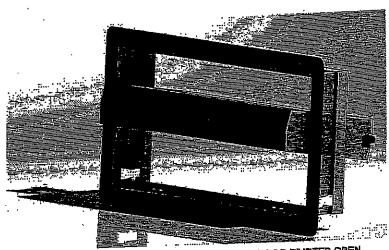


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

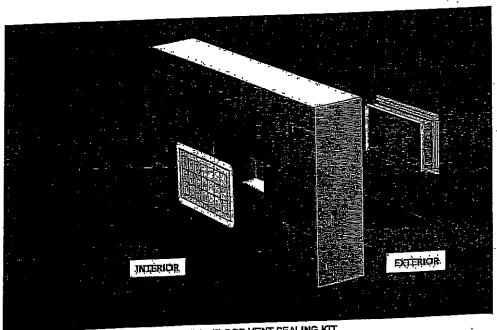


FIGURE 4—FLOOD VENT SEALING KIT





### ICC-ES Evaluation Report

### ESR-2074 CBC and CRC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

### 1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted

### Applicable code editioπ:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

#### 20 CONCLUSIONS

#### 21 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7.A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

#### 22 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®. . .

This supplement expires concurrently with the master report, reissued February 2019.



### ICC-ES Evaluation Report

### **ESR-2074 FBC Supplement**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95-43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

### 20 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code—Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

. This supplement expires concurrently with the master report, reissued February 2019.



Page 5 of 5

### U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

# ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SECT	ION A - PROPERTY	NFOR	VIATION		FOR INSUR	ANCE COMPANY USE
A1. Building Owner's Name SOKOL & ESMERALDA ZHEKU				Policy Numb	per:		
A2. Building Street Box No. 324 NORTH DUDL		uding Apt., Unit, Suite	, and/or	Bldg. No.) or P.O.	Route and	Company N	AIC Number:
City			-1-0	State		ZIP Code	
VENTNOR				New Jersey		08406	
A3. Property Desc BLOCK 215 LOT		d Block Numbers, Tax	Parcel	Number, Legal De	scription, etc.)		
A4. Building Use (	e.g., Resident	ial, Non-Residential, A	ddition,	Accessory, etc.)	RESIDENTIAL		
A5. Latitude/Longit	ude: Lat. 39	20' 45.1" l	ong. 7	4 28' 50.7"	Horizontal Datun	n: 🗌 NAD 1	927 🗵 NAD 1983
A6. Attach at least	2 photograph	s of the building if the	Certific	ate is being used to	obtain flood insur	ance.	•
A7. Building Diagra							
	_	ace or enclosure(s):					
l		pace or enclosure(s)		916 sq ft			
b) Number of	permanent flo	od openings in the cra	wlspac	e or enclosure(s) w	ithin 1.0 foot above	adjacent gra	ade6
		enings in A8.b 1,2		q in			
d) Engineered	flood opening	gs? 🛛 Yes 🗌 No	)				
, ,							
A9. For a building with an attached garage:  a) Square footage of attached garage							
<b>!</b>					ot above adjacent	nrade	0
		od openings in the att			ot above adjacent	3,000	
		enings in A9.b	И	sq in			
d) Engineered		gs? ∏ Yes ⊠ N					
	SE	CTION B - FLOOD IN	ISURA	<del></del>		ATION	
	B1. NFIP Community Name & Community Number VENTNOR 345326 B2. County Name ATLANTIC			B3. State New Jersey			
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	E	IRM Panel ffective/ evised Date	B8. Flood Zone(s	′   (Zo	se Flood Elevation(s) ne AO, use Base od Depth)
345326/0001	В	06/18/1971	09/15	/1983	A-8	10.00'	
		Base Flood Elevation (					
☐ FIS Profik	e ⊠ FIRM	Community Determ	nined (	Other/Source: _	4		
		sed for BFE in Item B9				ther/Source:	
B12. Is the building	g located in a	Coastal Barrier Resou	rces S	ystem (CBRS) area	or Otherwise Prof	ected Area (	OPA)? ☐ Yes ⊠ No
					•		
				•			

### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: in these spaces, copy the corresponding information from Secti	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route 324 NORTH DUDLEY AVENUE	e and Box No.	Policy Number:
City State ZIP C VENTNOR New Jersey 08406		Company NAIC Number
SECTION C - BUILDING ELEVATION INFORMATION	ON (SURVEY R	EQUIRED)
C1. Building elevations are based on: Construction Drawings* Building *A new Elevation Certificate will be required when construction of the building C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE Complete Items C2.a–h below according to the building diagram specified in Benchmark Utilized: RM-2	ing Under Construg is complete. E), AR, AR/A, AR Item A7. In Puerl	uction*   Finished Construction  AF AR/A1–A30, AR/AH, AR/AO.
Indicate elevation datum used for the elevations in items a) through h) below	·.	·
NGVD 1929 NAVD 1988 Other/Source:		
Datum used for building elevations must be the same as that used for the BF	- <b>L</b> .	Check the measurement used.
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	<u>6</u> , <u>70</u>	🔀 feet 🗌 meters
b) Top of the next higher floor	<u>15</u> , <u>40</u>	X feet meters
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A	🔀 feet 🗌 meters
d) Attached garage (top of slab)	N/A	x feet meters
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	<u>12</u> . 40	X feet  meters
f) Lowest adjacent (finished) grade next to building (LAG)	6, 60_	X feet  meters
g) Highest adjacent (finished) grade next to building (HAG)	<u>7</u> . <u>30</u>	X feet  meters
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	6. 77	X feet  meters
SECTION D - SURVEYOR, ENGINEER, OR ARC	HITECT CERTIF	FICATION
This certification is to be signed and sealed by a land surveyor, engineer, or archive the information on this Certificate represents my best efforts to interpret may be purishable by fine or imprisonment under 18 U.S. Code, Sect.	nitect authorized b oret the data avail ion 1001.	w law to certify elevation information.
Were latitude and longitude in Section A provided by a licensed land surveyor?	M Yes LINO	A Officer flete if accommende
Certifier's Name License Number DANIEL J. PONZIO, SR. GS37603		
Title		
LAND SURVEYOR		Place
Company Name ARTHUR W. PONZIO CO. & ASSOC., INC.		Seal Here
Address 400 NORTH DOVER AVENUE		
City State New Jersey	ZIP Code 08401	
Signature Date 10/23/2017	Telephone (609) 344-8194	
Copy all pages of this Elevation Certificate and all attachments for (1) community of	ficial, (2) insuranc	e agent/company, and (3) building owner
Comments (including type of equipment and location, per C2(e), if applicable)		
	EST DUCT WOR	K ELEV = 12.40'
		Form Page 2 of

### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

	g information from	Section A.		NCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/o 324 NORTH DUDLEY AVENUE	Policy Number					
	tate Z	ZIP Code	Company NAIC	C Number		
City		08406	L			
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.						
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).						
<ul> <li>Top of bottom floor (including basement, crawlspace, or enclosure) is</li> </ul>		feet met	ters 🔲 above o	or Delow the HAG.		
<ul> <li>b) Top of bottom floor (including basement, crawlspace, or enclosure) is</li> </ul>			<u> </u>	or Delow the LAG.		
E2. For Building Diagrams 6–9 with permanent flood op	enings provided in Se	ection A Items 8 and/	or 9 (see pages 1	–2 of Instructions),		
the next higher floor (elevation C2.b in the diagrams) of the building is			ters 🔲 above o	or below the HAG.		
E3. Attached garage (top of slab) is			ters 🗌 above o	or Delow the HAG.		
E4. Top of platform of machinery and/or equipment servicing the building is			ters 🗌 above o	or below the HAG.		
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	e, is the top of the bott No Unknown.	iom floor elevated in The local official mu:	accordance with t st certify this infor	he community's nation in Section G.		
SECTION F - PROPERTY OWN	ER (OR OWNER'S R	EPRESENTATIVE)	CERTIFICATION			
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	Con	tions A B and E for	Zone A (without a	FFMA-issued or		
Property Owner or Owner's Authorized Representative's						
Address	City		State	ZIP Code		
Signature	Date		Telephone			
Comments						

### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corre	sponding information from S	Section A.	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Su 324 NORTH DUDLEY AVENUE	Policy Number:					
City VENTNOR	-	ÎP Code 8406	Company NAIC Number			
SECTION G - COMMUNITY INFORMATION (OPTIONAL)						
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.						
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)						
G2. A community official completed Section or Zone AO.			·			
G3.  The following information (Items G4-						
G4. Permit Number	G5. Date Permit Issued	G6.	Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for:	New Construction  Substa	ntial Improvement				
G8. Elevation of as-built lowest floor (including of the building:	g basement)	fee	et 🗌 meters Datum			
G9. BFE or (in Zone AO) depth of flooding at t	the building site:	fee	et  meters Datum			
G10. Community's design flood elevation:		fee	et  meters Datum			
Local Official's Name Dino Cavalieri	Title	C.F.W				
Community Name	Telepl					
Ventror		609 82	23-7981			
Signature	Date					
Q-a-		123-27-	17			
Comments (including type of equipment and loc	cation, per C2(e), if applicable)					
	·					
		•				
			Check here if attachments.			

#### **BUILDING PHOTOGRAPHS**

**ELEVATION CERTIFICATE** 

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.

324 NORTH DUDLEY AVENUE

City State ZIP Code
VENTNOR New Jersey 08406

FOR INSURANCE COMPANY USE
Policy Number:

Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.


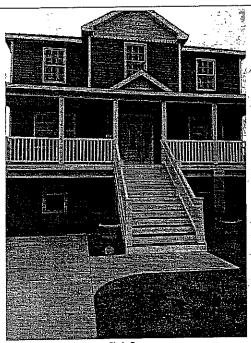


Photo One

Photo One Caption FRONT VIEW

10/23/17

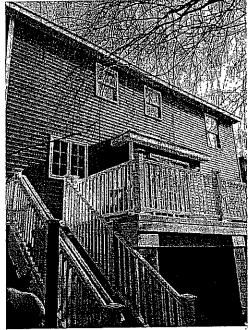

Pholo Two

Photo Two Caption REAR VIEW 10/23/17

### **BUILDING PHOTOGRAPHS**

### **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., U 324 NORTH DUDLEY AVENUE	Policy Number:		
City	State	ZIP Code	Company NAIC Number
VENTNOR	New Jersey	08406	•

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

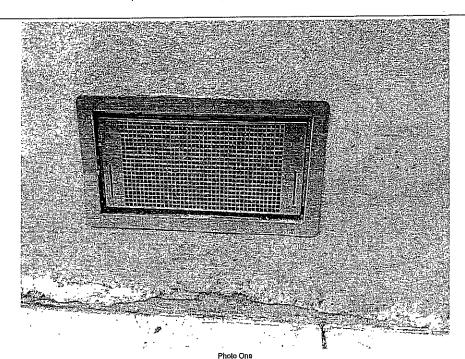


Photo One Caption SMART VENT MODEL 1540-510 10/23/17

Pholo Two