# DEPARTMENT OF BUILDING SAFETY & FLOOD PLAIN MANAGEMENT

6201 ATLANTIC AVENUE ROOM 4 823-7987 823-7966 FAX

For Insurance Company Use:

**VENTNOR CITY HALL** 



**VENTNOR CITY, N.J. 08406** 

## Memo of Review For Correctness and Completion

The attached FEMA Elevation Certificate has been reviewed by this office. The items noted below are not correct on the attached form and should read as entered on this page.

**SECTION A - PROPERTY INFORMATION** 

A1. Building Owner's Name Daniel Borkson	Policy Number
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	Company NAIC Number
City State ZIP Code Vertnen D.J. D8406	
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)	
100 1 12	
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.)  A5. Latitude/Longitude: Lat Long Horizontal Datum:  NAD 1927  NAD 1983	
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance.	
A7. Building Diagram Number <u>6</u>	
A8. For a building with a crawlspace or enclosure(s):  a) Square footage of crawlspace or enclosure(s)  A9. For a building with an a	· · · · · · · · · · · · · · · · · · ·
b) No. of permanent flood openings in the crawlspace or b) No. of permanent fl	ood openings in the attached garage
enclosure(s) within 1.0 foot above adjacent grade within 1.0 foot abov	re adjacent grade
	od openings in A9.b 1600 sq in penings? XYes No
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMAT	ION
B1. NFIP Community Name & Community Number  VENTOR  345326  B2. County Name  AttAntic	B3. State
	New Tarsey
B4. Map/Panel Number B5. Suffix B6. FIRM Index B7. FIRM Panel B8. Flood Date Effective/Revised Date Zone(s)	B9. Base Flood Elevation(s) (Zone AO, use base flood depth)
345326(0001 B 6-18-1971 9-15-1983 A-8	(0
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9.	
☐ FIS Profile     ☐ Community Determined   ☐ Other (Describe)	
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other (Desc	
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)  □ CBRS □ OPA	? 🗌 Yes 💢 No
Designation Date	
Local Official's Name Dino Cavalicia Title C.F.W.	
Community Name Ventuck Telephone 605 82	3-7987
Signature Date 2-3-20	20
Comments	





ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

**ESR-2074** 

Reissued 02/2019
This report is subject to renewal 02/2021.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

## REPORT HOLDER:


## SMART VENT PRODUCTS, INC.

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:
MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;
#1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence" A Subsidiary of CODE COUNCIL







## ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

<u>www.icc-es.org</u> | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

## 1.0 EVALUATION SCOPE

## Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code<sup>®</sup> (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>1</sup>The ADIBC is based on the 2009 IBC, 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

## Properties evaluated:

- Physical operation
- Water flow

### 2.0 USES

The Smart Vent<sup>®</sup> units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

## 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unfatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent<sup>®</sup> Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT<sup>®</sup> Stacking Model #1540-511 and FloodVENT<sup>®</sup> Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

## 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

## 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

## 4.0 DESIGN AND INSTALLATION

## 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square

feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 4.2 Flood Vent Sealing Kit

The Fiood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feat per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent<sup>®</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent<sup>®</sup> FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- **7.2** The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wali FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

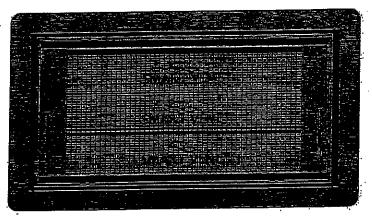


FIGURE 1-SMART VENT: MODEL 1540-510

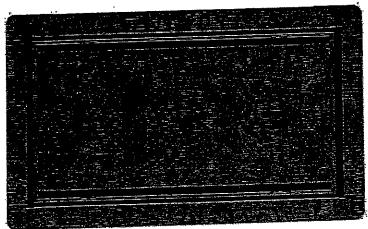


FIGURE 2-SMART VENT MODEL 1540-520


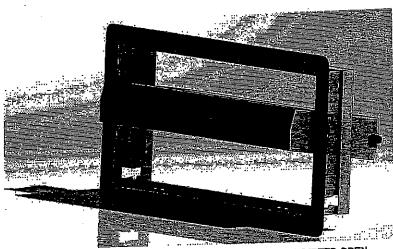


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



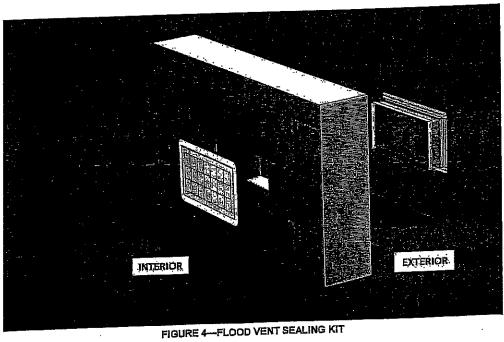

## ESR-2074 CBC and CRC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

## 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

## Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

## 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7.A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

## 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products\_recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®. . .

This supplement expires concurrently with the master report, reissued February 2019.



Page 4 of 5



## **ESR-2074 FBC Supplement**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95-43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074; have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

## 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the master report.

Use of the Smart Vent<sup>®</sup> Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential

For products failing under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2019.



## DEPARTMENT OF HOMELAND SECURITY

## Federal Emergency Management Agency ELEVATION CERTIFICATE IMPORTANT: FOLLOW THE INSTRUCTIONS ON PAGES 9-16

OMB Control Number: 1660-0008 Expiration: 11/30/2018

1 11 5 5 1 1 1 1 Configuration and all attentioners for (1) community	fy official, (2) lnsu	rance agent/compan	y, and (3) buildi	ng owner.
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.  SECTION A PROPERTY INFORMATION  FORM INSURANCE COMPANY USE				
A1. Building Owner's Name DANIEL BORKSON	Palicy Number:	Policy Number:		
A2. Building Street Address (Including Apt., Unit, Suite, and/or Bldg. No.) or Box No. 5105 WINCHESTER AVENUE	Company NAIC Number:	Company NAIC Number:		
City VENTNOR	State NJ		Zlp Code 08	406
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Leg BLOCK 100 LOT 12	jal Description, e	tc.)		
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, e	stc.) RESIDENTI	AL		
A5. Latitude/Longitude: Lat. 39 20' 44,5" Long. 74 28' 14.1" Hot	rizonial Datum:		@NAD 1983	
A6. Attach at least 2 photographs of the building if the Certificate is being u	sed to obtain floo	od Insurance.		
A7. Building Diagram Number 6	Δά Forabui	iding with an attach	ad parage;	
A8. For a building with a crawispace or enclosure(s):		•		na G
a) Square footage of crawlspace or enclosure(s) 496 sq ft	, ,	stage of attached ga		sq ft
Number of permanent flood openings in the 3     crawlspace or enclosure(s) within 1,0 foot     above adjacent grade	in the attac	i permanent flood op ched garage within 1 acent grade	enings 1,0 foot 8	
c) Total net area of flood openings in A8,b 600 sq in	c) Total net a	rea of flood opening	ıs in A9.b 160	0. sqin
d) Engineered flood openings? (e) Yes (C) No	d) Engineere	d flood openings?	(∳Yes (	· No
SECTION B - FLOOD INSURANCE RAT	TE MAP (FIRM)	INFORMATION	······································	
VENTOR 345326 ATLANT				3, State NJ
345326/0001 B Revised I	Date A-	8. Flood Zone(s) -8	B9, Base Floor (Zone AO, depth	d Elevation(s) use base flood
Sep 15, 1983			10,00'	
B10, Indicate the source of the Base Flood Elevation (BFE) data or base floo	od depth entered	in Item B9:		
← FIS Profile  FIRM ← Community Determined ← Other/Source:				<u></u>
B11. Indicate elevation datum used for BFE in Item 89: 🕟 NGVD 1929 🤇				
B12, is the building located in a Coastal Barrier Resources System (CBRS)	area or Otherwis	se Protected Area (C	OPA)? (C·Yes	€ No
Designation Date: OCBRS OOPA		,		
SECTION C - BUILDING ELEVATION INFO				
C1. Building elevations are based on: C Construction Drawings* C) Building Under Construction* - (Finished Construction C2. Elevations - Zones A1 - A30, AE, AH, A (with BFE), VE, V1 - V30, V (with BFE), AR, AR/A, AR/AE, AR/A1 - A30, AR/AH, AR/AO, Complete items C2.a -h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters.  *A new Elevation Certificate will be required when construction of the building is complete.				
Delicitified Officed: 13th a	erlical Datum: <u>No</u>			
Indicate elevation datum used for the elevations in items a) through h) below.    • NGVD 1929    • NAVD 1988				
Cother/Source:  Check the measurement used.				
Datum used for building elevations must be the same as that used for the Br				_
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	7	- 06	@feet @feet	⊜ meters ⊝ meters
b) Top of the next higher floor	15 N/A	- 98	(• feet	C meters
c) Bottom of the lowest horizontal structural member (V Zones only)	*5	- 79	(erfeet	( meters
d) Attached garage (top of slab)	<del></del>	10	V	i
Lowest elevation of machinery or equipment servicing the building     (Describe type of equipment and location in Comments)	**15	98-	(Free!	C melers
Lowest adjacent (finished) grade next to building (LAG)	<u>5</u>	- <u>58</u>	(• feet	Cimeters
g) Highest adjacent (finished) grade next to building (HAG)	6	- 49	( feet	C meters
<ul> <li>h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support</li> </ul>	5	- 79	(eal	() meters

## **ELEVATION CERTIFICATE**

OMB Control Number: 1566-0008 Expiration: 11/30/2018

S105 WINCHESTER AVENUE

FF144 F. ... 000 0 00 Fift

VENTNOR

NJ

08406

SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION				
This certification is to be signed and sealed by a that the information on this Certificate represent	a land surveyor, engi is my best efforts to i	neer, or arci nterpret the	nitect authorized	by law to certify elevation information. I certify
punishable by fine or imprisonment under 18 U.	S. Code, Section 10	21.		
Check here if attachments.	Were lalitude and longitude in Section A heck here if attachments, provided by a licensed land surveyor?			
	(@:Yes (∵l	No		
Certifier's Name DANIEL J. PONZIO, SR.	License Number GS37603		per	
Title LAND SURVEYOR	Company Name ARTHUR W. PONZIO CO. & ASSOC.INC		SSOC.INC	PLACE SEAL HERE
Address 400 N, DOVER AVENUE	City ATLANTIC CITY	State NJ	Zip Code 08401	
Signature	Date Telephone 10/6/16 +1 (609) 344-8194		i	
777		l		1.1-2.2.4.44
Copy both sides of this Elevation Certificate for (			ce agent/compa	ny, and (3) building owner.
Comments (including type of equipment and loc	ation , per C2(e), if a	pplicable)"		
PROJECT #32157-29 *2nd GARAGE	E ELEV = 5,88'	"MECH	ANICALS	
1/1/1/			- "	
Signature			<del></del>	Date 10/6/16
SECTION E - BUILDING ELEVATION INFO	DRMATION (SURVE	Y NOT REC	(LIRED) FOR ZO	
For Zones AO and A (without BFE), complete ite Sections A, B, and C. For Items E1 -E4, use natur	ms E1 -E5, If the Cer	lificate la ini	ended to suppor	t a LOMA or LOMR-F request, complete
E1, Provide elevation information for the following			ss to show whelf	er the elevation is above or below the
highest adjacent grade (HAG) and the lowest	adjacent grade (LAC	<b>∌).</b>		
a) Top of bottom floor (Including basement, c or enclosure) is	rawispace,		Cleet Cm	eters 🔲 above or 🔲 below the HAG.
<ul> <li>b) Top of bottom floor (including basement, c or enclosure) is</li> </ul>	rawispace,	- <del>-</del>	Creet Cime	lers 🔲 above or 🔲 below the LAG,
E2. For Building Diagrams 6 -9 with permanent for higher floor (elevation C2.b in the diagrams) of th		ed in Section		or 9 (see pages 8 -9 of Instructions), the next meters above or below the HAG.
E3. Attached garage (top of slab) is	Marketon According to		Cfeet Cme	ters 🔲 above or 🔲 below the HAG.
E4. Top of platform of machinery and /or equipme servicing the building is		<b></b>	C-feet C-me	ters 🔲 above or 🔲 below the HAG.
E5. Zone AO only: If no flood depth number is aver management ordinance? $\bigcirc$ Yes $\bigcirc$ No $\bigcirc$ L				i
SECTION F - PROPER				
The property owner or owner's authorized represse community-issued BFE) or Zone AO must sign he Property Owner or Owner's Authorized Represen	ntalive who complet re, The statements in	es Seclions	A, B, and E for Z	One A (without a FEMA-lesued or
Address	City .		State	ZIP Codè
Signature	Dale		Тејерћопе	
Comments				
				•
			•	
				Check here if allachments.

OMB Control Number; 1660-0008 Expiration: 11/30/2018

SECTION G - COMMUNITY INFORMATION (OPTIONAL)				
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate, Complete the applicable item(s) and sign below. Check the measurement used in Items G8 - G10. In Puerlo Rico only, enter meters.				
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)				
G2. A community official completed Section E for AO.				
G3. The following information (items G4 -G10) is	provided for community floo	dplain management	purposes.	
G4. Permit Number G5.	Date Permit Issued	G6. Date Certificate	of Compliance/Occupancy Issued	
G7. This permit has been issued for: \( \int \) New Constru	ction   C: Substantial Impro	vement		
G8. Elevation of as-built lowest floor (including basem of the building:	ent)	Cifeet Cimeters	Dalum	
G9. BFE or (In Zone AO) depth of flooding at the buildi	ng	Cifeel Cimelers	Dalum	
G10. Community's design flood elevation:		Criset Cometers	Datum	
Local Official's Name Divide CAVA-1	Tille	CEM.		
Community Name Ventor	Telephone	609 82	3-1987	
Signature	Dale	10-25	16	
Comments				
			·	
_				
			·	
· ·				
			Charle kinn if affackmanin	
			Check here if attachments.	

## **BUILDING PHOTOGRAPHS**

See instructions for Item A6

OMB Control Number: 1690-0008 Expiration: 11/30/2018

	the telegraph of the Carolina A	IFOR INSTRANCE COMPANY USE
IMPORTANT: In these spaces, copy the co	presponding information from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (Including Apt., Unit, 8	Suite, and/or Bidg. No.) or P.O. Route and Box No.	Policy Number:
5105 WINCHESTER AVENUE		
City VENTMOR	State NJ Zip Code	Company NAIC
ACMINON	U8405	Number:
وأحوا معامل والأنب والمستناء والمتاريخ والمتاريخ والمتاريخ والمتاريخ	P flood insurance, affix at least 2 building photographice, "Front view" and Rear view", and, if required, "R	ioni side view and Leit olde view. Autori
applicable, photographs must show the founds submitting more photographs than will fit on th	ation with representative examples of the flood open	ings of vertis, as litalicated in dection As.
sapriliting flore protographs than the areas	are programmed to the contract of the contract	
SEE ATTACHED PHOTOS		
•		
·		
	•	
		•
	•	
	* v	
	•	
•		
•		
	•	

