DEPARTMENT OF BUILDING SAFETY & FLOOD PLAIN MANAGEMENT

VENTNOR CITY HALL 6201 ATLANTIC AVENUE ROOM 4 823-7987 823-7966 FAX



Memo of Review For Correctness and Completion

The attached FEMA Elevation Certificate has been reviewed by this office.

The items noted below are not correct on the attached form and should read as entered on this page.

| SEC | TION A - PROPERTY INFORMA | ATION | For Insurance Company Use: | | | |
|--|---|----------------------|---|--|--|--|
| A1. Building Owner's Name | Policy Number | | | | | |
| A2. Building Street Address (including Apt., Unit, Suite, and/or |). | Company NAIC Number | | | | |
| City State ZIP Code | | | | | | |
| A3. Property Description (Lot and Block Numbers, Tax Parcel | Number, Legal Description, etc.) | | | | | |
| A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) A5. Latitude/Longitude: Lat Long Horizontal Datum: NAD 1927 NAD 1983 A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance. A7. Building Diagram Number A8. For a building with a crawlspace or enclosure(s): | | | | | | |
| SECTION B - FLOOD | INSURANCE RATE MAP (FIRM | I) INFORMATION | | | | |
| B1. NFIP Community Name & Community Number | B2. County Name イートルイン | | B3. State Hew Jewy | | | |
| B4. Map/Panel Number B5. Suffix B6. FIRM Index Date 345326 (000 (B - 18-15) | Effective/Revised Date | B8. Flood Zone(s) | B9. Base Flood Elevation(s) (Zone AO, use base flood depth) | | | |
| B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9. FIS Profile | | | | | | |
| Local Official's Name Dino Cavalica Community Name Vantual | Title C.F. | .w. | 987 | | | |
| Signature | Date | 2-4-2020 | - | | | |
| Comments | - the control of the | | | | | |



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-E5 | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued D2/2019
This report is subject to renewal D2/2021.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:


MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;

#1540-524; #1540-514

FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence" A Subsidiary of Subsidiary







ICC-ES Evaluation Report

ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLODD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018_2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 *international* Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

The ADIBC is besed on the 2009 IBC, 2009 IBC code sections referenced In this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

20 USES

The Smart Verit[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural varifilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vartically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 27.22 and Section 27.3 of ASCE/SEI 24-14 [Section 2522 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural vantilation. The SmartVENT Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit

The Flood Vent Seating Kit Model #1540-526 is used with SmarfVENT® Model #1540-520. It is a Homasofe 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 Smart/ENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walks or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 27.2.2 and 27.3 of ASCE/SEI 24.14 [Section 26.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Ssaling Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.55 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vants (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM 5283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDERO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

| MOLE 1-10-10-10-10-10-10-10-10-10-10-10-10-10 | | | | |
|---|--------------|--|--------------------|--|
| | MODEL NUMBER | MODEL SIZE (în.) | COVERAGE (sq. fl.) | |
| MODEL NAME | | 15 ³ /4" X 7 ³ /4" | 200 ' | |
| FloodVENT® | 1540-520 | | 200 | |
| SmartVENT® | 1540-510 | 15 ³ / ₄ " X 7 ³ / ₄ " | | |
| FloodVENT® Overhead Door | 1540-524 | 15 ³ / ₄ " X 7 ³ / ₄ " | 200 | |
| | 1540-514 | 15 ³ / ₄ " X 7 ³ / ₄ " | 200 | |
| Smart/ENT® Overhead Door | <u> </u> | 14" X B3/4" | 200 | |
| Wood Wall FloodVENT® | 1540-570 | | 200 | |
| Wood Wall FloodVENT® Overhead Door | 1540-574 | 14" X 5 ³ /4" | | |
| WOOD WHII FINDS VERY CONTRACTOR | 1540-511 | 16" X 16" | 400 | |
| SmartVENT® Stacker | ···· | 15" X 15" | 400 - | |
| FloodVent® Stacker | 1540-521 | ID X ID | 1 | |

For St: 1 inch = 25.4 mm, 1 square foot = m²

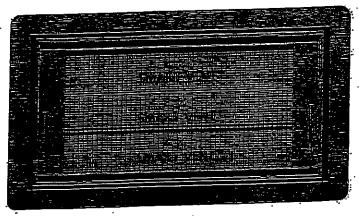


FIGURE 1-SMART VENT: MODEL 1540-510

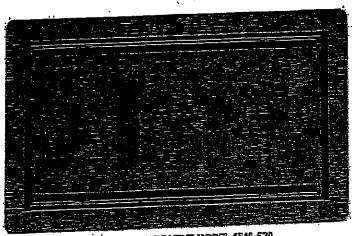


FIGURE 2—SMART VENT MODEL 1540-520


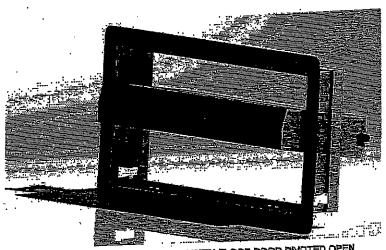


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



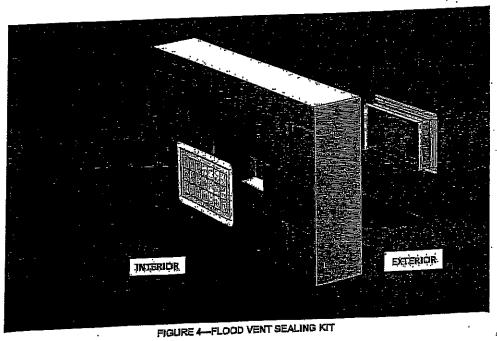

ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, Purpose: recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

20 CONCLUSIONS

21 CBC: The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7.A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 international Residential Code® (IRC) provisions noted in the mester report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the international Wildland-Urban Interface Code®

This supplement expires concurrently with the master report, reissued February 2019.



ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: OB OD OD-OPENINGS.

Section: 08 95-43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES mester report ESR-2074; have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code--Residential

20 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code—Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

. This supplement expires concurrently with the master report, reissued February 2019.

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

| SECTION A - PROPERTY INFORMATION | | | FOR INSURANCE COMPANY USE | | | |
|--|--|----------|-------------------------------------|---|----------------------|--|
| A1. Building Owner's Name SCOTT RITTER | | | | | Policy Num | ber: |
| A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O, Route and Box No. 6 NORTH LAFAYETTE AVENUE | | | | | Company NAIC Number: | |
| City VENTNOR | City State | | | | | • |
| A3. Property Descript BLOCK 131 LOT 24 | ion (Lot and Block Numbers, Tax | Parce | Number, Legal De | scription, etc.) | | |
| A4. Building Use (e.g. | ., Residential, Non-Residential, A | ddition | , Accessory, etc.) | RESIDENTIAL | | , |
| | e: Lat. 39 20' 07.6" L | | | • | : NAD 1 | 1927 🔀 NAD 1983 |
| A6. Attach at least 2 p | photographs of the building if the | Certific | ate is being used to | o obtain flood insura | nce. | |
| A7. Building Diagram | Number 8 | | | | | |
| A8. For a building with | a crawispace or enclosure(s): | | | | | |
| a) Square footag | e of crawlspace or enclosure(s) | | 1,000 sq ft | | | • |
| b) Number of pen | manent flood openings in the crav | wlspac | e or enclosure(s) w | ithin 1.0 foot above | adjacent gr | ade5 |
| c) Total net area | of flood openings in A8.b1,00 | 00 s | q in | | | |
| d) Engineered flo | od openings? 🗵 Yes 🗌 No | ŀ | | | | |
| A9, For a building with | an attached garage: | | | | | , |
| | a) Square footage of attached garage o sq ft | | | | | |
| | manent flood openings in the atta | | | ot above adiacent d | rade | 0 |
| | of flood openings in A9.b | | sq in | • | · · | |
| • | | | 5 4 m | | | |
| a) Engineered lice | od openings? Tyes 🔀 No | , | | | | |
| | SECTION B - FLOOD IN | SURA | NCE RATE MAP | (FIRM) INFORMA | rion | |
| • | Name & Community Number | | B2. County Name | | | B3. State |
| VENTNOR | 345326 | | ATLANTIC | | | New Jersey |
| B4, Map/Panel B5 Number | 5. Suffix B6. FIRM Index Date | Ef | RM Panel fective/ evised Date | 88, Flood Zone(s) | / (Zor | e Flood Elevation(s) ne AO, use Base nd Depth) |
| 345326/0001 B | 06/18/1971 | 09/15/ | | A-8 | 10,00' | |
| B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: | | | | | | |
| ☐ FIS Profile 🗵 | FIRM Community Determine | ned [| J Other/Source: _ | | | |
| B11. Indicate elevation | n datum used for BFE in Item B9: | ⊠ NO | 3VD 1929 NA | VD 1988 [.] Oth | er/Source: | <u></u> |
| B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No | | | | | | |
| Designation Date | Designation Date: CBRS DPA | | | | | |
| | | | | | | |

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: **6 NORTH LAFAYETTE AVENUE** Company NAIC Number ZIP Code State City 08406 New Jersey VENTNOR SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) ☐ Building Under Construction* Construction Drawings* C1. Building elevations are based on: *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations - Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Vertical Datum: NGVD 1929 Benchmark Utilized: RM-3 Indicate elevation datum used for the elevations in items a) through h) below. NGVD 1929 NAVD 1988 Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. ☐ meters 8,62 a) Top of bottom floor (including basement, crawlspace, or enclosure floor) <u>14</u> 30 X feet meters | b) Top of the next higher floor N/A ☐ meters Bottom of the lowest horizontal structural member (V Zones only) N/A X feet meters d) Attached garage (top of slab) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) 14 30 meters X feet 7,99 meters x feet Lowest adjacent (finished) grade next to building (LAG) 8, 40 X feet meters g) Highest adjacent (finished) grade next to building (HAG) 8, 10 meters Lowest adjacent grade at lowest elevation of deck or stairs, including structural support SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? ⊠Yes ☐ No X Check here If attachments. License Number Certifler's Name GS37603 DANIEL J. PONZIO, SR. PROFESSIONAL LAND SURVEYOR Place Company Name Seal ARTHUR W. PONZIO CO. & ASSOC., INC. Here 400 NORTH DOVERAVENUE ZIP Code State City 08401 New Jersey ATLANTIC Telephone Date Signature (609) 344-8194 05/10/2017 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) SMART VENT MODEL #1540-510 **DUCT WORK = 12.32** *MECHANICALS PROJECT #33216-29

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

| IMPORTANT: In these spaces, copy the correspo | FOR INSURANCE COMPANY US | 듸 | | | |
|---|--|--|---|-----|--|
| Building Street Address (including Apt., Unit, Suite, a 6 NORTH LAFAYETTE AVENUE | Policy Number: | | | | |
| City VENTNOR | | ZIP Code 08406 | Company NAIC Number | | |
| SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) | | | | | |
| | ONE AO AND ZONE A | | a LOMA or LOMP E request | ᅱ | |
| For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters. | | | | | |
| E1. Provide elevation Information for the following a the highest adjacent grade (HAG) and the lowe | ind check the appropriate st adjacent grade (LAG). | poxes to snow wheth | | | |
| a) Top of bottom floor (including basement, crawlspace, or enclosure) is | | _ | ers 🗌 above or 🗍 below the HAG | ;, | |
| b) Top of bottom floor (including basement, crawispace, or enclosure) is | * | _ | | | |
| E2. For Building Diagrams 6–9 with permanent floo | d openings provided in Se | ection A Items 8 and/o | | | |
| the next higher floor (elevation C2.b in the diagrams) of the building is | | | | - 1 | |
| E3. Attached garage (top of slab) is | | | ers | . | |
| E4. Top of platform of machinery and/or equipment servicing the building is | | | ers 🔲 above or 🗌 below the HAG | , | |
| E5. Zone AO only: If no flood depth number is avail floodplain management ordinance? Yes | able, is the top of the bott No Unknown. | om floor elevated in a The local official mus | occordance with the community's t certify this information in Section G. | | |
| SECTION F - PROPERTY C | WNER (OR OWNER'S R | EPRESENTATIVE) | ERTIFICATION | | |
| The property owner or owner's authorized represent community-issued BFE) or Zone AO must sign here | | | | | |
| Property Owner or Owner's Authorized Representat | | | | | |
| Address | City | | State ZIP Code | | |
| Signature | Date | | elephone | | |
| Comments | | | | | |
| | • | | | | |
| | | | | | |
| · | | | | | |
| | | | | | |
| | · | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | Check here if attachments. | | |

OMB No. 1660-0008

Expiration Date: November 30, 2018 **ELEVATION CERTIFICATE** FOR INSURANCE COMPANY USE IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Roufe and Box No. Policy Number: **6 NORTH LAFAYETTE AVENUE** Company NAIC Number ZIP Code State City 08406 **New Jersey VENTNOR** SECTION G - COMMUNITY INFORMATION (OPTIONAL) The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8-G10. In Puerto Rico only, enter meters. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.) A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) G2. or Zone AO. G3. The following information (Items G4-G10) is provided for community floodplain management purposes. G6. Date Certificate of G5. Date Permit Issued G4. Permit Number Compliance/Occupancy Issued G7. This permit has been issued for: Elevation of as-built lowest floor (including basement) G8. feet meters Datum of the building: ☐ feet ☐ meters Datum G9. BFE or (in Zone AO) depth of flooding at the building site: ☐ feet ☐ meters Datum G10. Community's design flood elevation: Title Local Official's Name Telephone Community Name Date Signature 5-10-17 Comments (including type of equipment and location, per C2(e), if applicable)

Check here if attachments.

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

| IMPORTANT: in these spaces, cop | FOR INSURANCE COMPANY USE | | |
|---|---------------------------|-------------------|---------------------|
| Building Street Address (Including A 6 NORTH LAFAYETTE AVENUE | | | |
| City VENTNOR | State New Jersey | ZIP Code 08406 | Company NAIC Number |

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption FRONT VIEW

5/4/17



Photo Two Caption RIGHT SIDE VIEW

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

| IMPORTANT: In these spaces, co | FOR INSURANCE COMPANY USE | | |
|---|---------------------------|----------|---------------------|
| Building Street Address (including 6 NORTH LAFAYETTE AVENUE | Policy Number: | | |
| City | State | ZIP Code | Company NAIC Number |
| VENTNOR | New Jersey | 08406 | |

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.


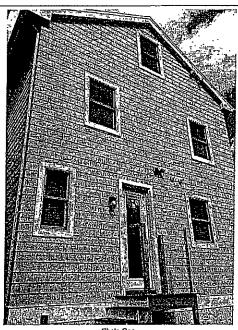


Photo One

Photo One Caption REAR VIEW 5/4/17

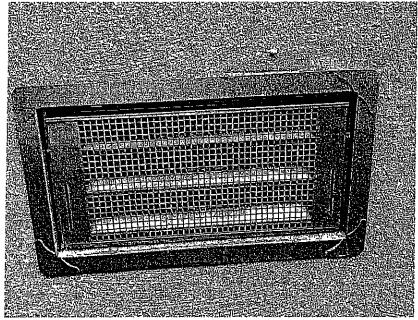

Phola Two

Photo Two Caption SMART VENT MODEL #1540-510 5/4/17