DEPARTMENT OF BUILDING SAFETY

FLOOD PLAIN MANAGEMENT

VENTNOR CITY HALL 6201 ATLANTIC AVENUE ROOM 4 823-7987 823-7966 FAX



VENTNOR CITY, N.J. 08406

Memo of Review For Correctness and Completion

The attached FEMA Elevation Certificate has been reviewed by this office. The items noted below are not correct on the attached form and should read as entered on this page.

		SEC ⁻	TION A - PROPERTY INFORM	MATION	For Insurance Company Use:
A1. Building Owner's Nam	ONLY Y	hilemen	5		Policy Number
A2. Building Street Addres	s (including Apt.	, Unit, Suite, and/or l	3ldg, No.) or P.O. Route and Box N	No.	Company NAIC Number
City State	ZIP Code	0 240	6		
A3. Property Description (Lot and Block Nu	mbers, Tax Parcel N	lumber, Legal Description, etc.)		
A4. Building Use (e.g., Re: A5. Latitude/Longitude: La A6. Attach at least 2 photo A7. Building Diagram Num A8. For a building with a c a) Square footage of b) No. of permanent i enclosure(s) within c) Total net area of fle d) Engineered flood of	t Long. graphs of the bu ber rawlspace or end crawlspace or end lood openings in 1.0 foot above a bod openings in	Hou	rizontal Datum: NAD 1927 e is being used to obtain flood insu A9. For a a sq ft a) So b) No wi a sq in c) To	irance. building with an attac quare footage of attac	ched garage sq ft I openings in the attached garage djacent grade openings in A9.b sq in
	SEC	TION B - FLOOD	NSURANCE RATE MAP (FIR	M) INFORMATION	<u> </u>
B1. NFIP Community Name	e & Community N	lumber	B2. County Name		B3. State
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	B7. FIRM Panel Effective/Revised Date	B8. Flood Zone(s)	B9. Base Flood Elevation(s) (Zone AO, use base flood depth)
☐ FIS Profile B11. Indicate elevation datu	☐ FIRM m used for BFE	☐ Community Detein Item B9: ☐ NGV	— ,	e) Other (Describe	∍) □ Yes □ No
Local Official's Name	ino c	avelieni	Title	C-F.W.	·
Community Name	entnon	evelien	Telephone		-3-79 <i>8</i> 7
Signature	- (= :		Date	2-4-202	-0
Comments			· · · · · · · · · · · · · · · · · · ·		,

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9. Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. SECTION A - PROPERTY INFORMATION FOR INSURANCE COMPANY USE A1. Building Owner's Name Policy Number: ANTHONY PHILEMENO A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number: 9 NORTH SWARTHMORE AVENUE City State ZIP Code VENTNOR New Jersey 08406 A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) BLOCK 133 LOT 6 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) RESIDENTIAL A5. Latitude/Longitude: Lat. 39,20'04" Horizontal Datum: NAD 1927 X NAD 1983 A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance. A7. Building Diagram Number A8. For a building with a crawlspace or enclosure(s): a) Square footage of crawlspace or enclosure(s) 497 sq ft b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade 3 c) Total net area of flood openings in A8.b 600 d) Engineered flood openings? X Yes No A9. For a building with an attached garage: a) Square footage of attached garage 497 sq ft b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade c) Total net area of flood openings in A9.b d) Engineered flood openings? SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION B1. NFIP Community Name & Community Number **B2.** County Name B3. State VENTNOR -345326 **ATLANTIC New Jersey** B4. Map/Panel B6. FIRM Index B5. Suffix **B7. FIRM Panel** B8. Flood Zone(s) B9. Base Flood Elevation(s) Number Date Effective/ (Zone AO, use Base Flood Depth) Revised Date 345326/0001 06/18/1971 09/15/1983 A-8 10.00 B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source: B11. Indicate elevation datum used for BFE in Item B9: X NGVD 1929 NAVD 1988 C Other/Source: B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No Designation Date: CBRS OPA

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 20

IMPORTANT: In these spaces, copy ti	e corresponding information from	S41 1	Expiration Date. November 30, 20
Building Street Address (including Apt.	Unit. Suite and/or Pldg No.1 or P.O.	Section A.	FOR INSURANCE COMPANY US
9 NORTH SWARTHMORE AVENUE		Route and Box No.	Policy Number:
VENTNOR		ZIP Code 08406	Company NAIC Number
SECTION C	- BUILDING ELEVATION INFORM	ATION (SURVEY	REQUIRED
C1. Building elevations are based on:		Building Under Const	
*A new Elevation Certificate will be	required when construction of the hu	ilidina is complete	
· UZ, Elevations – Zones Α1–Δ30 ΔΕ Δ	AH, A (with BFE), VE, V1–V30, V (with cording to the building diagram specific		R/AE, AR/A1-A30, AR/AH, AR/AO. erto Rico only, enter meters,
Indicate elevation datum used for t	he elevations in items a) through h) be	elow	
☑ NGVD 1929 ☐ NAVD ·	1988 C Other/Source:		
Datum used for building elevations	must be the same as that used for the	e BFE.	
a) Top of bottom floor (including be	asement, crawispace, or enclosure flo	or) 7, 92	Check the measurement used.
b) Top of the next higher floor	and the state of t	16 84	X feet meters
	structural member (V Zones only)	N/A	X feet
d) Attached garage (top of slab)	Talasta (Hombor (V Zories Orly)	7 70	X feet meters
e) Lowest elevation of machinery of	or equipment servicing the huilding	12, 3	X feet meters
incorne type or eduthitistic auc	i location in Comments)		✓ ✓ ✓ meters
f) Lowest adjacent (finished) grade	· · · · · · · · · · · · · · · · · · ·	7.04	X feet meters
g) Highest adjacent (finished) grade	The state of the s	<u>7, 3</u>	X feet meters
h) Lowest adjacent grade at lowest structural support	elevation of deck or stairs, including	7, 19	▼ feet
SECTION D	– SURVEYOR, ENGINEER, OR AF	CHITECT CERTIF	ICATION
This certification is to be signed and seal I certify that the information on this Certifi statement may be punishable by fine or i	ed by a land surveyor, engineer, or ar	chitect authorized by	the state of the s
Were latitude and longitude in Section A			
Certifier's Name DANIEL J. PONZIO, SR.	License Number		
Title	G\$37603		
PROFESSIONAL LAND SURVEYOR			
Company Name ARTHUR W. PONZIO CO. & ASSOC., IN	^		Place
Address	See		Seal
100 NORTH DOWER AVENUE	<i>e</i> .		Here
SILY ATLANTIC CITY	State New Jersey	ZIP Code 08401	
Signatu/e	7 Date 03/21/2019	Telephone (609) 344-8194	
opy all pages of this Elevation Certificate of	nd all attachments for (1) community of	ficial, (2) insurance a	gent/company and (3) building owner
omments (including type of equipment an	nd location, per C2(e), if applicable)		The state of the s
ROJECT# 34394-F-1929 MACHINER SMART VEI	RY ELEVATION IS THE HEATER = 1 NTS ARE MODEL 1540-520	12.30' NGVD -1929	
SHOULT VE	THE PIECE MICHAEL 1940-920		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the displaying Street Address (including Ant Lin	Corresponding		Expiration Date: November 30,
Building Street Address (including Apt., Uni 9 NORTH SWARTHMORE AVENUE	Suite and/or pure	from Section A.	FOR INSURANCE COMPANY
9 NORTH SWARTHMORE AVENUE	a date, alloyof Blog. No.) or	P.O. Route and Box No.	Policy Number:
City			, , , , , , , , , , , , , , , , , , , ,
VENTNOR	State	ZIP Code	Companyable
	New Jersey	00400	Company NAIC Number
SECTION E - BUI	LDING ELEVATION INFOI FOR ZONE AO AND ZONE	MATION (CHEVEV NO	
For 7 4.0	FOR ZONE AO AND ZONE	A (WITHOUT BEE)	T REQUIRED)
For Zones AO and A (without BFE), complet complete Sections A, B, and C. For Items E1 enter meters.	e Items E1-E5 If the Continu		
enter meters.	-E4, use natural grade, if av	allable. Check the manner	a LOMA or LOMR-F request.
complete Sections A, B, and C. For Items E1 enter meters. E1. Provide elevation information for the foll the highest adjacent grade (HAG) and it a) Top of bottom floor (including basem)	The second of th	THEASUR	ement used. In Puerto Rico only,
the highest adjacent grade (HAC)	owing and check the appropr	fate boxes to show whath	See Albania and the see of the se
a) Top of bottom floor (including basem	le luwest adjacent grade (LA	G).	or the elevation is above or below
l and a supplement of efficient to the		<u> </u>	
b) Top of bottom floor (including baseme	ent.	feet mete	rs 🔲 above or 🔲 below the HA
or an enclosure) is			
E2. For Building Diagrams 6–9 with permane the next higher floor (elevation C2.b in the diagrams) of the building is	at flood if		rs ☐ above or ☐ below the LA
the next higher floor (elevation C2.b in	THE HOOD openings provided in	Section A Items 8 and/or	9 (see pages 1.2 of the true
	#	[]	
E3. Attached garage (top of slab) is	• • • • • • • • • • • • • • • • • • • •	feet _ meter	s □ above or □ below the HA
		— ☐ feet ☐ meters	
E4. Top of platform of machinery and/or equip servicing the building is	ment		s ☐ above or ☐ below the HA
	······································		
floodplain management	available, is the top of the hi	thom A	B ☐ above or ☐ below the HAC
E5. Zone AO only: If no flood depth number is floodplain management ordinance?	Yes No Unknown	The local official	ordance with the community's
he property owner or owner's authorized repre- ommunity-issued BFE) or Zone AO must sign	LY CM/MED AD AUTOMA	79.74	
ddress			.,
	City	State	ZIP Code
gnature			ZIF Code
	Date	Telen	hone
mments		70104	10416
			<u> </u>
			1
			,
			:
			i
			1
			THE COLUMN TWO IS NOT
			1
Form 086-0-33 (7/15)	Replaces all provious additi	<u> </u>	Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

Building Street Address (including Apt 1)	corresponding information	from C 4	Expiration Date: November 30,
Building Street Address (including Apt., U 9 NORTH SWARTHMORE AVENUE	nit, Suite, and/or Bldg. No Vor	P O Pouts	FOR INSURANCE COMPANY
9 NORTH SWARTHMORE AVENUE		Route and Box No.	Policy Number:
VENTNOR	State	710.0	1.
- ZATITOR	New Jersey	ZIP Code 08406	Company NAIC Number
SE SE	CTION G - COMMUNITY		
The local official who is authorized by	CTION G - COMMUNITY INFO	DRMATION (OPTIONAL)	
Sections A, B, C (or E), and G of this Eleviused in Items G8–G10. In Puerto Rico only G1. The information in Section C was engineer, or architect who is authorized in the Comments area below G2. A community official completed S or Zone AO. G3. The following information (Items C) G4. Permit Number	or ordinance to administer the ation Certificate. Complete the ation Certificate. Complete the sy, enter meters. It taken from other documentation or ized by law to certify elevation. Section E for a building located in the community of the c	community's floodplain mapplicable item(s) and signor that has been signed an information. (Indicate the control of the contro	anagement ordinance can complete in below. Check the measurement on below. Check the measurement individual sealed by a licensed surveyor, he source and date of the elevation. Assued or community-issued BFF ent purposes. The Certificate of compliance/Occupancy Issued in meters.
240 O	the building site:	[] feet [meters
10. Community's design flood elevation:		[] feet [7
ocal Official's Name] meters Datum
Dono Cavalia	Title		
ommunity Name		C.F.w.	
Ventros	Telepi	none	
pnature	- Harris	hae a	
<u> </u>	Date	2018	23-7987
mments (including type of equipment and loc	ation, per C2(a) Warning B	2-4-20	S
D D	> Por Oz(e), il applicable)	-	
z-w fon	Corce	too - no-	Ω.
C2. F)	- - 		,
- 2, 17	. (4.9)		
			•
			İ
,			
			,
			ľ
_			1,
			1
,			
			ļ
			1
	,		· ·

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008

ELEVATION CERTIFICATE IMPORTANT: In these spaces, copy the corresponding information from Section A. Expiration Date: November 30, 2018 Building Street Address (Including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. FOR INSURANCE COMPANY USE 9 NORTH SWARTHMORE AVENUE Policy Number: City State **VENTNOR** ZIP Code Company NAIC Number New Jersey 08406

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date teken; "Front View" and "Rear View", and, if required, "Right Side View" and "Left Side View" When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption FRONT 5/31/19



Photo Two Caption LEFT SIDE 5/31/19

BUILDING PHOTOGRAPHS

New Jersey

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 9 NORTH SWARTHMORE AVENUE City

FOR INSURANCE COMPANY USE Policy Number.

State

ZIP Code 08406

Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View," When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption RIGHT SIDE 5/31/19

ELEVATION CERTIFICATE

VENTNOR

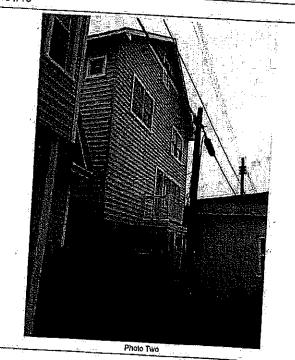


Photo Two Caption REAR 5/31/19



Wost Widely Accepted one Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | WWW.Icc-es.org

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:


SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council ·(WSSPC) Award in Excellence"

·A Subsidiary of

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ESR-2074

Reissued February 2019

This report is subject to renewal February.2021.

www.lcc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC, 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs Internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). in order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) Insert with 21 - 2-inch-by-2inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:-

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square

feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 Inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 I/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air Infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact Information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368
www.smartvent.com Info@smartvent.com

TABLE 1-MODEL SIZES

()			
MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
	15 ³ / ₄ " × 7 ³ / ₄ "	200	
1540-510	15 ³ / ₄ " × 7 ³ / ₄ "	200	
1540-524	15 ³ /4" × 7 ³ /4"	200	
1540-514	$15^3/4" \times 7^3/4"$	200	
1540-570	14" X 8 ³ / ₄ "	200	
1540-574	14" X 8 ³ /4"	200	
1540-511	16" X 16"	400	
1540-521	16" X 16"	400	
	1540-524 1540-514 1540-570 1540-574 1540-511	1540-520	

For St: 1 Inch = 25.4 mm; 1 square foot = m2

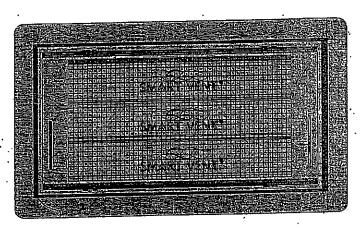


FIGURE 1-SMART VENT; MODEL 1540-510

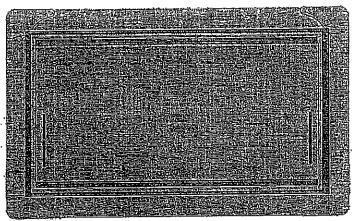
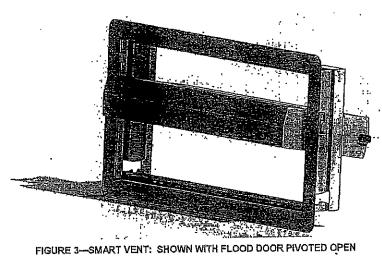


FIGURE 2-SMART VENT MODEL 1540-520



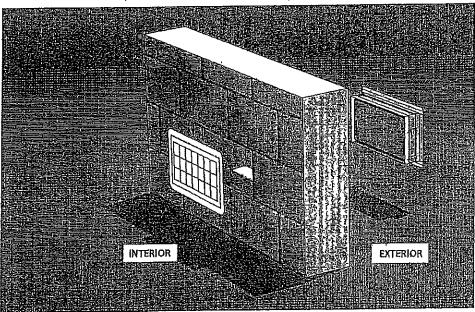


FIGURE 4-FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent[®] Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code[®] (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code®* (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code.

This supplement expires concurrently with the master report, reissued February 2019.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43 Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code_Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2019.

